

# IN-GROUND SEPTIC TANK




## FEATURES

- ✓ 3000L In-Ground Septic Tank
- ✓ NT Government Department of Health approved (01/16)
- ✓ Complies to AS/NZ 1546.1.2008 Standard
- ✓ Quality tested for thickness and strength
- ✓ Anchor points to avoid uplift
- ✓ Ribbed, complete unit (no separate lid) for strength and durability
- ✓ Ready to install and easily serviceable




## STANDARD TECHNICAL SPECIFICATION - PRODUCT CODE ST3


Weight: 150kg | Height: 1830mm | Diameter at top: 2000mm | Diameter at base: 1550mm

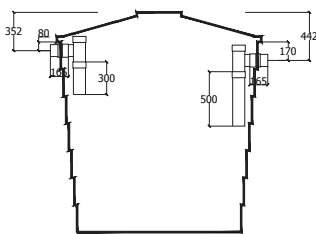

SECTION - SEPTIC

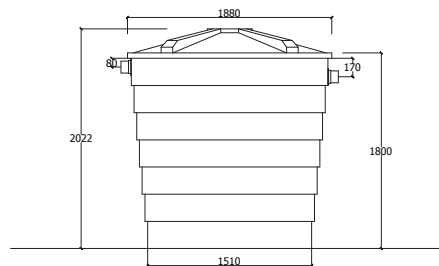

ELEVATION - SEPTIC



PLAN - SEPTIC

### Terracorp Industries Quality Management System

Complies with AS/NZS ISO 9001:2015

Our registration covers the QMS for design, development and manufacture of plastic water tanks and plastic products.



For more information on our full product range, visit [www.terracorptanks.com.au](http://www.terra<span>corp</span>tanks.com.au)

Address: 9 Beresford Road, Yarrowonga, Palmerston NT 0830

Phone: 08 8932 8222 | Email: [info@terracorp.com.au](mailto:info@terra<span>corp</span>.com.au)

ABN 65 922 045 074



# WASTE STORAGE TANKS



**Terracorp Industries Waste Storage Tank is designed for collecting waste from buildings that do not have a sewer connection.**

It is a great option to use under transportable buildings and at temporary sites.

Suitable for use in remote locations where no facility exists to dispose of waste in an environmentally safe way.

Recommended for use on mining sites, construction sites, rural stock camps, army training camps and at special event locations.

The waste tank and frame is certified to engineering certificates no E12468A.

The sturdy steel frame that encapsulates the waste tank is rated to support a building mass of up to 8 tonnes.




The waste tank is made from polyethylene with a UV rating of 24 and is not affected by rust, chemicals or effluent waste.

Each tank holds approximately 2000 litres and can be interlocked to increase waste storage capacity up to 6000 litres.

## MULTIPLE TANKS - INTERCONNECTED IN FRAME

Individual units can be interconnected to provide either WST 4000 or WST 6000 configurations.

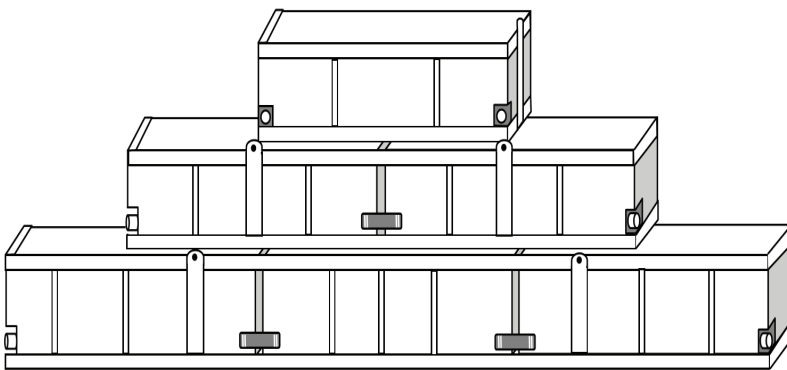

WST 2000	Weight 300kg Height 650mm Length 2300mm Width 1750mm
WST 4000	Weight 600kg Height 650mm Length 2300mm Width 3700mm
WST 6000	Weight 900kg Height 650mm Length 2300mm Width 5650mm

For more information on our full product range, visit [www.terraeorptanks.com.au](http://www.terraeorptanks.com.au)

Address: 9 Beresford Road, Yarrowonga, Palmerston NT 0830

Phone: 08 8932 8222 | Email: [info@terraeorp.com.au](mailto:info@terraeorp.com.au)

ABN 65 922 045 074

